

# ON-170

Power by WEICHAI

# WP6D167E200

Prime power: 136KW/170KVA

Standby power: 150KW/187.5KVA

## GENERATING POWER SOLUTIONS



### Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

### Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

### Reduced transport and installation costs



The compact and robust design with integrated transport features enables faster and safer transport and installation.

### Reduced service & maintenance costs

Longer service intervals. Quicker and more efficient service jobs.

### Premium resale value

Designed and built to last.

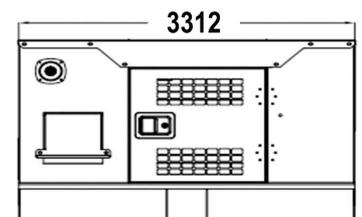

# ONEWPOWER

[WWW.ONEWPOWER.COM](http://WWW.ONEWPOWER.COM)

DIMENSION		OPEN TYPE	SILENT TYPE
Length (L)	mm	2400	3312
Width (W)	mm	950	1100
Height (H)	mm	1510	1760
Dry weight	kg	1500	2300
Fuel tank	L	240	290

## Technical Data

### Model ON-170

Rated prime power	KW	136
Rated standard power	KW	150
Rated voltage line to line	V	380~415
Maximun sound level	dB(@7m)	≤72

### Engine

Model	WP6D167E200	
Aspiration	Turbochargine and aftercooled	
Fuel system	mechanical pump	
No. cylinders	6	
Displacement	Liquid	6.75
Bore*Stroke	mm	105*130
Compression ratio	18:1	
Rated speed	r/min	1500
Rated net power(with fan)	Kw	136
Governor type	Electronic	

### Exhaust system

Exhaust gas flow	600kg/h	
Exhaust gas temp	° F (° C)	<720
Max back pressure	8KPA	

### Aspiration system

Max inlet pressure	kPa	≤3.5
Combustion volume	L/s	/
Air flow	kg/h	727

### Fuel system

100% load(Prime power)	L/h	35.6
75% load(Prime power)	L/h	26.1
50% load(Prime power)	L/h	17.6
Fuel tank capacity	L	290

### Lubrication system

Oil capacity	L	20
Oil consumption	L/H	35.6
Oil pressure	kPa	10
(continuous operation)		

### Cooling system

Coolant capacity	L	8
Thermostat operation range	°C	76-88
Max water temperature	°C	98

### Alternator

Model	ON-170	
Phase	3	
Voltage	V	380~415
Bearing	1	
Power factor	0.8	
Frequency	Hz	50
Prime power	KW	136
Exciter Type	Brushless, self-excitation	
Voltage regulation	%	±0.5
Protection Grade	IP 23	
Insulation grade	H/H	
Altitude	m	≤1000

### Controller

- Model
- Protective functions:
- Low oil pressure
  - High water temperature
  - High/low voltage
  - High Engine Temperature and Overspeed.
  - Voltage regulator frequency regulator
  - Emergency stop
  - Start failure



### Control Module Options



- Auto generator control module
- Control module with "Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

## Standard features

- Engine
- Radiator 50°C max, fans are driven by belt
- 24V charge alternator
- Alternator: single bearing alternator IP23, insulation class H/H
- Standard auto control system
- One set of air filter, fuel filter, oil filter
- Main line circuit breaker/MCCB
- Base fuel tank
- Two 24V batteries, rac and cable
- Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler)
- User manual

## Options

- Battery charge
- Engine heater
- Alternator heater
- PMG
- Water oil separator
- Daily fuel tank
- Remote control panel
- Automatic transfer switch/ATS
- Switch box
- Standard: ● Options: ○

## Warranty



### WEICHAI ENGINE

12 months from date of purchase and 1000 hours.

### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

## Dimensions

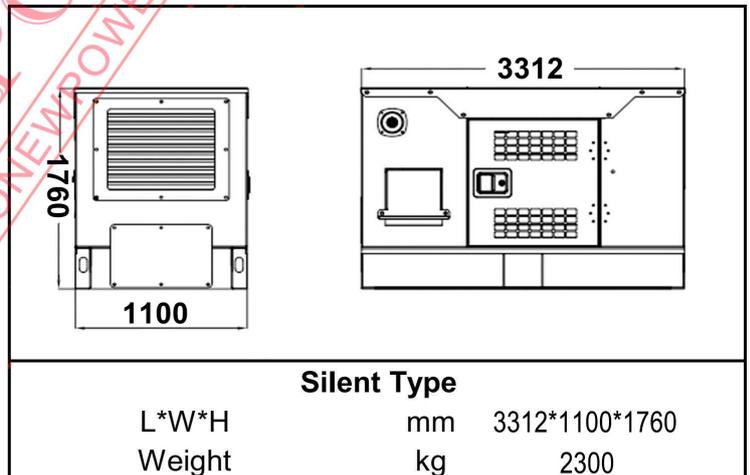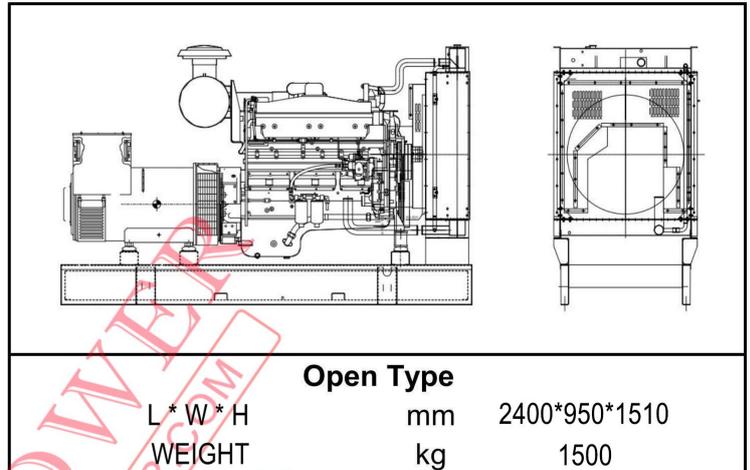

# ONEWPOWER

ADD: NO . 1 0 7 XIYUAN ROAD , JINAN DISTRICT, FUZHOU CITY, FUJIAN, CHINA

Phone: 15980204507 E-mail: jina@onewpower.com

WWW.ONEWPOWER.COM

